
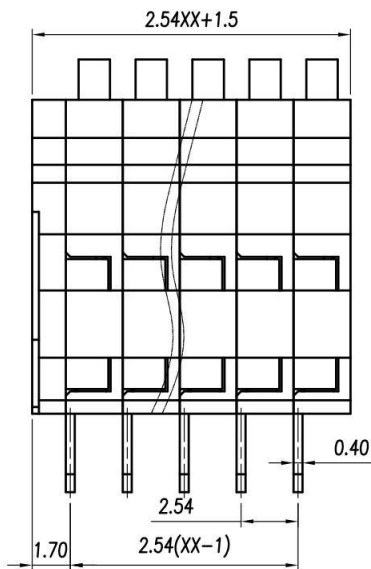



P.C.B. LAYOUT

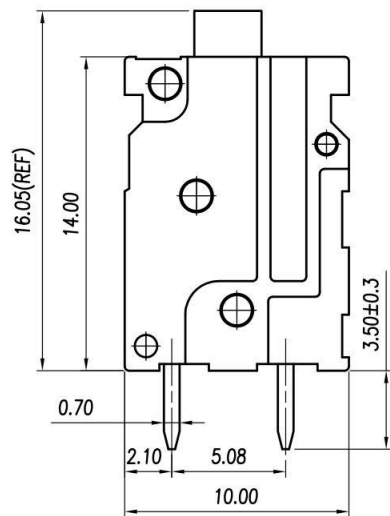

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数		UL/CUL Technical Data			
等级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	150	-	-	
额定电流	Rated Current [A]	5	-	-	
接线范围	Wire Range	26-18			
单/多芯线	Solid/Stranded [AWG]	26-18			
耐电压	Withstanding Voltage	1300V/1Min			
IEC 技术参数		IEC60947-7-4			
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage [V]	63	160	320	
额定电流	Rated Current [A]	6	6	6	
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5	
导线截面积	Wire cross section	0.5-1.0			
硬质/柔性导线	Solid/flexible [mm <sup>2</sup> ]	0.5-1.0			
材料		Material			
绝缘材料	Insulation Material	PA66			
阻燃等级	Flammability	UL94V-0			
导体材料	Conductor Material	铜合金 Copper alloy			
导体表面镀层	Conductor Plating	镀锡 Sn Plated			
一般参数		Other Data			
间距	Pitch /极数 Poles [mm] / [P]	2.54/ 02~30			
剥线长度	Stripping Length [mm]	11			
螺丝	Screw/扭矩 Torque(Max) [N.m]	/			
工作温度	Operating temperature [°C]	-40~105			
焊锡温度	Soldering temperature [°C]	250°C/5S			
引针尺寸	Pin Dimensions [mm]	0.7*0.4			
PCB板孔径	PCB Hole Diameter [mm]	Ø1.0			

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Contact:sales@nbkafeng.com

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	3:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	V0
宁波咖峰电子有限公司 NINGBO KAFENG ELECTRONIC CO.,LTD						名称/TITLE	KF211V-2.54-XXP	